




MULTI-EFFECTOR CONTROLLER

ACTUATION, PROPULSION AND POWER SYSTEM CONTROL

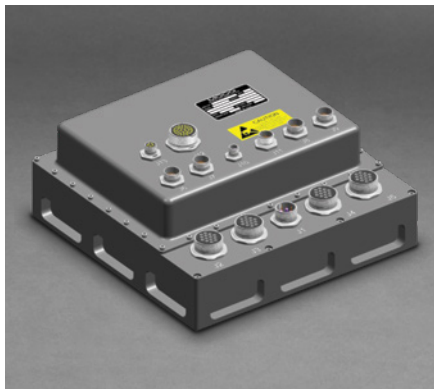

Hypersonic vehicles require high-density control systems optimized for size, weight, and power. Moog offers the Multi-Effector Controller, which tightly couples actuation and propulsion control, power management, sensor conditioning, and battery activation into a single package. Compared to a classic federated vehicle approach consisting of multiple separate units, a control system based on the Multi-Effector Controller

provides 25% volume savings and reduced interconnects. The Multi-Effector Controller's roadmap includes a tactical variant, a space radiation-hardened variant, options to host a flight computer package, and Moog can modify the design for application specific environments and communication protocols.

KEY FEATURES

- The Multi-Effector Controller integrates actuation, propulsion, and power system control into a single package, yielding increased system performance and savings in volume and latency.
- A control system based on the Multi-Effector Controller offers a single solution to control many aspects of a hypersonic vehicle, also resulting in reduced programmatic and schedule cost and risk.
- The Multi-Effector Controller includes provisions to incorporate a flight computer for navigation, guidance, attitude, and motion control loops.
- A robust roadmap drives gated maturation based on relevant testing with HWIL integration and through flight testing.
- This next generation control system enables increased lethality and range in deployed weapons systems due to reduced weight, power, and volume (25% or greater reduction possible.)



MULTI-EFFECTOR CONTROLLER

MULTI-EFFECTOR CONTROLLER 1.0: AEROSPACE GRADE OPTION PERFORMANCE

Characteristics	Specifications
Overview	4-channel reconfigurable hypersonic actuation controller
Power inputs	28 VDC avionics power, 140-270 VDC motor power
Power output	Designed for up to 12,000 watts per channel, custom power levels available
Communications	RS-422 and LVDS communications
Key features	Sine drive field oriented control, or 6-step motor drive
	Reprogrammable FPGA with external memory and tunable parameters
	Resolver commutation, LVDT feedback interfaces
	Resizable power stages available
Optional features	Operation to >1,000 km altitude
	4x differential analog telemetry inputs (pressure, temperature, etc.)
	2x squib fire drivers (for battery initiation, pyro initiators, etc.)
	8x solenoid/brake drivers (dual switching)
EEE parts grade	Up to 6x additional RTD interfaces
Radiation tolerance	Commercial aerospace grade, automotive (AEC-Q-200/100)
EMI/EMC	N/A, technical insertion → version 2.0 & 3.0
Thermals	MIL-STD-461 compliant
Physical properties	-40 °C to +70 °C baseplate
Manufacturing	9.5" x 9.5" x 3.8", 10.5 lbs
	IPC-6010 class 3, J-STD-001

MULTI-EFFECTOR CONTROLLER 2.0: SPACE RADIATION HARDENED OPTION PERFORMANCE

Characteristics	Specifications
Overview	2-4-channel reconfigurable space radiation hardened hypersonic actuation controller
Power inputs	28 VDC avionics power, 140-270 VDC motor power
Power output	Designed for up to 12,000 watts per channel, custom power levels available
Communications	RS-422 and discrete digital safety/interlock interfaces
Key features	Qty 2 or qty 4 sine drive field oriented control or 6-step motor drive
	Qty 6 solenoid drivers for ACS thrusters
	Reprogrammable FPGA with external memory and tunable parameters
	Resolver commutation, LVDT feedback interfaces
	Resizable power stages available
Optional features	Space radiation hardened logic/ACS electronics for operation through exo-atmospheric flight
	4x differential additional analog telemetry (pressure, temperature)
	2x squib fire drivers (for battery initiation, pyro initiators, etc.)
	2x additional solenoid drivers (brake drive, pin-pullers, etc.)
EEE parts grade	Up to 6x additional RTD interfaces
EMI/EMC	Control/ACS electronics: space radiation hardened
Thermals	Power electronics: Commercial aerospace grade, PEMS/automotive (AEC-Q-200/100), powered off during exoatmospheric flight
Physical properties	MIL-STD-461 compliant
Manufacturing	-40 °C to +70 °C baseplate
	2-channel variant: 9.5" x 6.5" x 3.8", 10.0 lb
	IPC-6010 class 3, J-STD-001

MOOG

AMERICAS
missiles@moog.com
www.moog.com/defense

AUSTRALIA
Info.australia@moog.com
www.moog.com.au

EUROPE
defenceeurope@moog.com
www.moog.com/defence



Moog Space and Defense



Moog Inc.



@Moog_Inc



@Moog.Inc

The appearance of U.S. Department of Defense (DoD) visual information does not imply or constitute DoD endorsement.

These products are subject to export control laws and regulations of the United States government and fall under the control jurisdiction of either ITAR or EAR regulations. Please contact our company Export Representative at +1-716-687-4930 for additional export information.

©2025 Moog, Inc. All rights reserved.

Product and company names listed are trademarks or trade names of their respective companies.

Form 500-1443 020425